# **DANPALON®** GLAZING MATERIAL

Translucent and Opaque Microcell Panels with Standing Seam Connection



CLADDING

SKYLIGHTS





INTERIOR



# SUPERIOR LIGHT TRANSMISSION FOR CUTTING-EDGE ELEGANCE





Excellent resistance to hail



Complete UV protection




Excellent warranty protection



Flexible design options



Recyclable

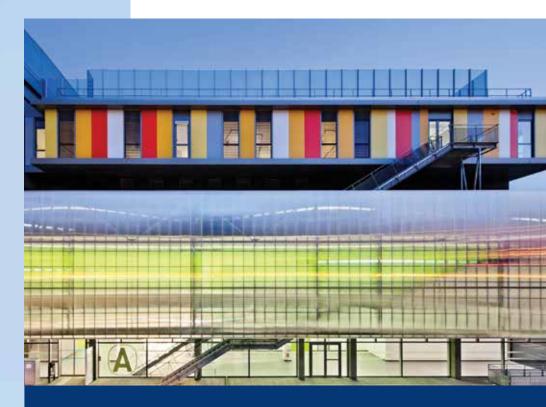

### THE ARCHITECTURE OF LIGHT

# The sun: the best natural source of light and energy

Danpalon<sup>®</sup> harnesses this inexhaustible source, providing exceptional quality of light. Danpalon's glazing material features Microcell panels which offer customers the best combination of translucency and strength, transmitting an even diffusion of natural light, with superior durability and impact resistance.

#### The optimal solar and thermal balance

The Danpalon<sup>®</sup> panel provides exceptional quality of light, a rich non-industrial visual appeal and delivers thermal insulation and UV protection. Danpalon<sup>®</sup> contributes to optimal efficiency and significant savings in energy costs.

Centre Hospitalier Sud Francilien, France Glazing: Danpalon® 16mm | Architect: Groupe-6 Architectes

# DANPALON® PANEL LIGHT DIFFUSION. STRENGTH. FLEXIBILITY.

### SUPERIOR LIGHT DIFFUSION

The Microcell structure transmits an even diffusion of natural light, producing a rich look. Specifically designed for architectural daylight applications, the tight spacing between the ribs produces a superior quality of light, offering unique iridescence - reflecting and dispersing light in a way unmatched by any other material. Danpalon<sup>®</sup> Microcell panels are available in a range of thicknesses and widths.

### EXCEPTIONAL DURABILITY AND THERMAL INSULATION


Danpalon<sup>®</sup> Microcell panels are manufactured with unique and innovative extrusion technology, providing ten times more cells than the majority of other sheets on the market. The smaller spans between the rib supports give customers the best combination of translucency and strength. Danpalon<sup>®</sup> Microcell panels are 100% leakproof, offering superior impact resistance and thermal insulation.



Gymnasium Posco, Korea | Danpal® Single Glazing, 16mm | Architect: Posco A&C

### THE DANPALON MICROCELL STRUCTURE FEATURES 10 TIMES MORE CELLS THAN OTHER PANELS ON THE MARKET


The high concentration of cells provides Danpalon<sup>®</sup> Microcell with significantly lower thermal conductivity, improved mechanical properties and rigidity with high impact resistance.



Classic alveolar panel structure

### HIGH PERFORMANCE AND WEATHER RESISTANCE


Due to the tightness between the vertical supports, Danpalon<sup>®</sup> Microcell offers superior air and water tightness together with highest resistance to impact and hail damage.

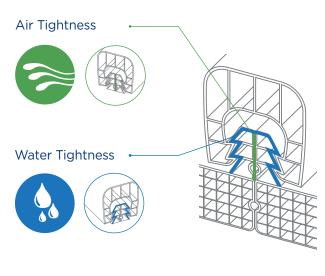

- Reinforced safety gauge
- Improved inertia for improved lightness
- The very best air and water tightness available

### **BENEFITS**

- 100% waterproof
- Free thermal movement
- Easy installation
- High impact resistance
- Excellent thermal insulation
- Quality diffused daylight
- Cold bending of panels on site
- Reduced substructure
- Environmentally friendly product

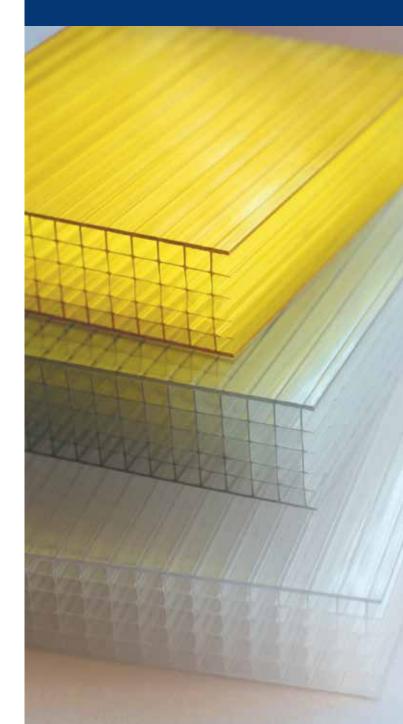

# DANPALON® 3DLITE PANEL

### **BALANCE YOUR LIGHT**

### Block direct heat and glare

Optimizing natural light in buildings is an ongoing challenge. Danpalon 3DLITE is an advanced, innovative panel developed by Danpal<sup>®</sup>, enabling architects to design creatively while contributing to energy savings and increased lighting efficiency. Danpalon 3DLITE contains alternating integrated shading louvres which selectively control the sunlight to penetrate evenly during the day, while offering thermal insulation and a special dynamic look.



CIIDET College & University, Mexico | Glazing: Danpalon 3DLITE | IIFEQ Architects

### **3DLITE STRUCTURE**

### Balancing daylight throughout the day

Danpalon 3DLITE allows the sun's rays to penetrate through at higher levels during the morning and afternoon, while reducing heat in the middle of the day. This fixed, cost-effective solution optimizes daylight in office buildings, shopping malls, schools, libraries, stadiums, museums, and more.







Cafeteria Unitec Atizapan, Mexico | Glazing: Danpalon 3DLITE. Danpal 16mm






### BENEFITS

- Dynamic light diffusion
- Flexible solution for summer and winter
- Optimises daylight throughout the day
- Wide variety of colours
- Part of Danpal's systems

# DANPALON<sup>®</sup> KINETIC PANEL DUAL COLOUR PANEL WITH DYNAMIC LOOK

Fascinating design is all a matter of perspective. And that's exactly what you get with Kinetic – the dynamic design solution from Danpal that enables the viewer to see a structure in one colour from one direction, and another colour from the other direction - providing a dynamic visual experience that changes depending on your perspective.



Give buildings a new look With its appealing, innovative exterior, Kinetic revitalizes the appearance of any building rejuvenating older buildings or adding innovation when planning a new building.

### BENEFITS

- Dynamic look
- The ability to combine two colors in one panel
- Unparalleled choice of colours and colour combinations
- Lightweight
- Part of Danpal's systems



Variety of color combinations

# **FINISHES**

### DANPAL OFFERS A RANGE OF PANEL SURFACE FINISHES ACCORDING TO ENVIRONMENTAL CONDITIONS AND ARCHITECTURAL REQUIREMENTS

## SOFTLITE FOR VISUAL COMFORT

Softlite finishing greatly diminishes glare effects. Softlite is a 100% permanent matt finish applied by co-extrusion on Danpalon® panels of any thickness and colour. The Softlite finishing performance is independently validated to ensure maximum visual comfort, regardless of the exposure and type of building.

- Reduced "neon" effect
- Greater light diffusion
- Increased feeling of comfort



## HP - HIGH PROTECTION TREATMENT

Danpalon<sup>®</sup> HP is an advanced surface treatment that enables higher performance in areas of graffiti removal and protection against environmental pollution.

The Danpalon® HP surface treatment can be applied to most types of Danpalon® panels.







| CHEMICAL DESCRIPTION                                       | WITHOUT HP | WITH НР |  |
|--|------------|---------|--|
| Gasoline   | yes        | yes     |  |
| Toluene  | no         | yes     |  |
| Acetone  | no         | yes     |  |
| 5% Ammonia   | no         | yes     |  |
| 10% Caustic Soda   | no         | yes     |  |
| 50% Caustic Soda   | no         | no      |  |
| GaffiGauard 2010<br>(Guard Industrie France)               | no         | yes     |  |
| GaffiGauard Decap Façade<br>Guard (Guard Industrie France) | no         | yes     |  |
| GaffiGauard 2030<br>(Guard Industrie France)               | no         | yes     |  |




Veolia Energy, UK | Danpalon Single Glazing 16 mm Architects: S'pace


# DANPALON LOW E EFFECT


Allow better use of daylighting without adding more heat.

Infrared treatment is a co-extruded finish that significantly limits solar heat gain without affecting light transmission levels - creating better utilisation of daylight.

It works by selectively blocking solar radiation, leading to a reduction in solar loads and enabling significant reductions in air conditioning costs and carbon emissions.

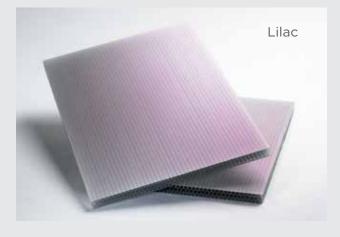

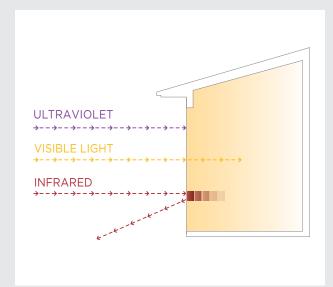

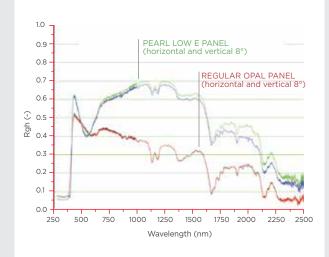


"PEARL LOWE" has improved IR reflectivity characteristics, compared to a similar panel without infrared treatment (as shown in the graph).




# DANPALON® PANEL IDENTIFICATION -FOR FULL TRACEABILITY

Danpalon<sup>®</sup> is unique in offering details on the panel itself. These details include date of manufacture, enabling customers to easily see whether they are within their 10 year warranty period.

# **IRIDESCENT APPEARANCE**

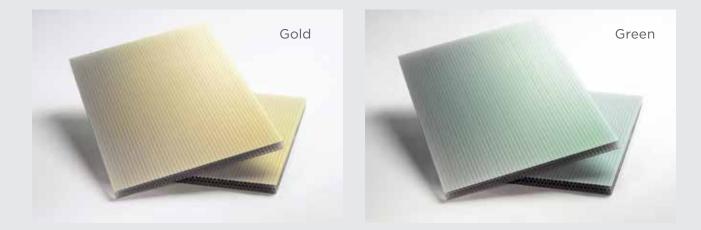

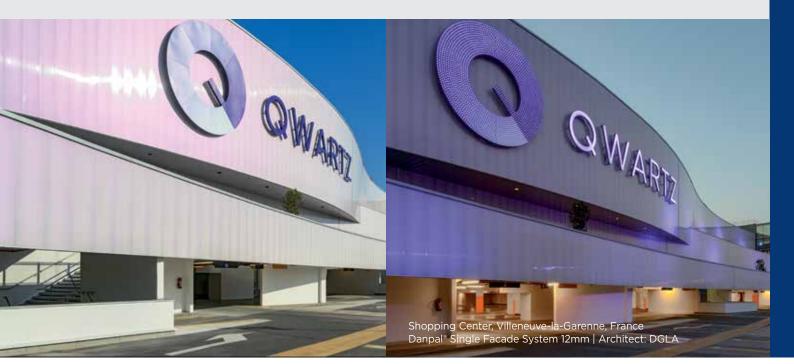


## HEAT WELDED EDGES FOR PERFECT FINISHING

The welded edges provide a clean and effective solution that prevents water, dirt or insects from getting inside the microcells.




# TRANSLUCENT AND OPAQUE

For bright colours with a metallic, lacquered appearance, choose the opaque panels available in a wide range of tints. With Danpal's translucent range, the appearance of the building changes with the light and reflections projected onto the facade at different times of day.

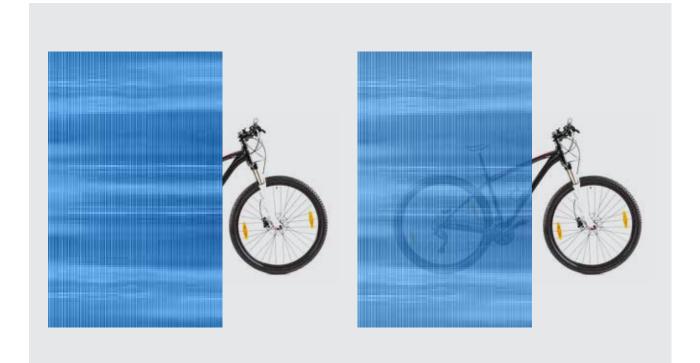

# **BICOLOUR FOR SPECIAL EFFECT**

Our bicolour option enables you to perfectly adapt your facades to the effect you desire, both inside and outside. It is available in the colours of your choice for all Danpal® systems (subject to minimum quantities and lead times).

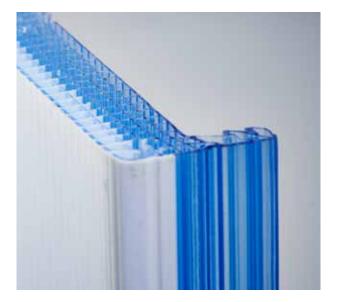



# UNLIMITED DESIGN OPTIONS AND STUNNING EFFECTS

As well as creatively playing with light in structures, with Danpalon<sup>®</sup> textures you can also play with different prints and designs. Danpalon's textures and prints bring a wide array of design options for interior and exterior walls and ceilings. We provide high quality designs and stunning effects that are perfectly adapted and overlaid. This allows you to create any type of atmosphere or appearance, adding interest to structures and complementing the design.



Secondary School P. Mendes, Arques, France | Glazing: Danpalon® Printed | Architect: Soupey Toth Architecte



Nurcery School, France | Glazing: Danpalon® Printed, 16mm | Architect: Weber et Albrech



Oddo Nursery School, Marseille, France Glazing: Danpalon® Printed, 16mm | Architect: Camille Richard Lenoble



Liberty Creche, Le Petit Quevilly, France Glazing: Danpalon® Printed, 16mm Architect: Gérard Bourdon

# LET OUR COLOURS INSPIRE YOU

#### SHADES OF WHITE

| 1          | -        |           |
|------------|----------|-----------|
|            |          |           |
|            |          |           |
| Clear CR57 | Ice IC51 | Opal OP22 |

#### SOFTLITE SHADES OF WHITE



#### METALLIC

Amber AR35

Bronze BR35 Reflective Gray RG20



Metallic Ice MI15

Copper CU11

#### SOFTLITE METALLIC



#### COLOURFUL

| Blue BL49   | Sapphire Blue<br>BS21 | Blue Arctique<br>BA15 | Green VE44  | Lime Green LI39 | Empire Green<br>EM18 | Yellow JA50 |
|-------------|-----------------------|-----------------------|-------------|-----------------|----------------------|-------------|
|             |                       |                       |             |                 |                      |             |
| Orange OG36 | Red RO18              | Magenta MA07          | Purple MV32 | Brown TO15      | Grey GR31            | Black NR00  |

#### SOFTLITE COLOURFUL



#### COLOURFUL OPAQUE



#### **3DLITE**

|                                   | Blue | Lime Green | Green | Red | Violet |
|-----------------------------------|------|------------|-------|-----|--------|
| Chocolate Ivory Orange Grey White |      |            |       |     |        |

### OPTICAL AND THERMAL PROPERTIES FOR STANDARD COLORS

|                                  | STANDARD        |      | COMPACT<br>4MM | MULTICELL/<br>HONEYCOMB<br>8/10/12MM | MULTICELL<br>16/22MM | MULTICELL<br>35MM |  |
|----------------------------------|-----------------|------|----------------|--------------------------------------|----------------------|-------------------|--|
|                                  |                 | LT%  | 86             | 67                                   | 57                   |                   |  |
| Contraction of the second second |                 | ST%  | 79             | 62                                   | 53                   |                   |  |
|                                  | Clear CR57      | SR%  | 11             | 29                                   | 36                   | on request        |  |
|                                  |                 | SHGC | 0.81           | 0.64                                 | 0.55                 |                   |  |
|                                  |                 | LT%  | 55             | 58                                   | 47                   | 42                |  |
|                                  |                 | ST%  | 58             | 57                                   | 46                   | 42                |  |
|                                  | Ice IC51        | SR%  | 20             | 30                                   | 35                   | 38                |  |
|                                  |                 | SHGC | 0.62           | 0.60                                 | 0.50                 | 0.46              |  |
|                                  |                 | LT%  | 19             | 20                                   | 18                   |                   |  |
|                                  | Reflective Gray | ST%  | 16             | 16                                   | 19                   |                   |  |
|                                  | RG20            | SR%  | 24             | 31                                   | 31                   |                   |  |
|                                  |                 | SHGC | 0.28           | 0.27                                 | 0.29                 |                   |  |
|                                  | Opal OP22       | LT%  | 34             | 35                                   | 21                   |                   |  |
|                                  |                 | ST%  | 42             | 41                                   | 28                   |                   |  |
|                                  |                 | SR%  | 31             | 39                                   | 45                   |                   |  |
|                                  |                 | SHGC | 0.47           | 0.45                                 | 0.34                 |                   |  |
|                                  | Green VE44      | LT%  | 69             | 51                                   | 44                   |                   |  |
|                                  |                 | ST%  | 67             | 52                                   | 44                   |                   |  |
|                                  |                 | SR%  | 11             | 23                                   | 28                   |                   |  |
| ACCESSION NUMBER                 |                 | SHGC | 0.71           | 0.57                                 | 0.5                  |                   |  |
|                                  | Blue BL49       | LT%  | 62             | 50                                   | 49                   | on request        |  |
|                                  |                 | ST%  | 72             | 57                                   | 51                   |                   |  |
|                                  |                 | SR%  | 11             | 27                                   | 33                   |                   |  |
|                                  |                 | SHGC | 0.76           | 0.60                                 | 0.54                 |                   |  |
|                                  | Bronze BR35     | LT%  | 37             | 25                                   | 29                   |                   |  |
|                                  |                 | ST%  | 41             | 27                                   | 31                   |                   |  |
|                                  |                 | SR%  | 8              | 16                                   | 21                   |                   |  |
|                                  |                 | SHGC | 0.51           | 0.38                                 | 0.41                 |                   |  |
|                                  |                 | LT%  | 41             | 28                                   | 31                   |                   |  |
|                                  |                 | ST%  | 51             | 36                                   | 36                   |                   |  |
|                                  | Grey GR31       | SR%  | 9              | 19                                   | 28                   |                   |  |
| WEARING AND AND AND              |                 | SHGC | 0.59           | 0.45                                 | 0.43                 | -                 |  |

#### **View more Colours**



#### LEGEND

LT - % of visible light transmission (400 - 700nm)


ST - % of total solar radiation transmission (300 - 2800nm)


SR - % of total solar reflection (300-2800nm)


**SHGC** - Solar Heat Gain Coefficient. Total solar energy transmitted through the panel = %ST+0.2x[1-(%st+%sr)].

Tests were performed in accordance with ASHRAE 74-1988 procedures. Figures are indicative and may change within manufacturers' production tolerances.

### **RANGE OF PANELS**

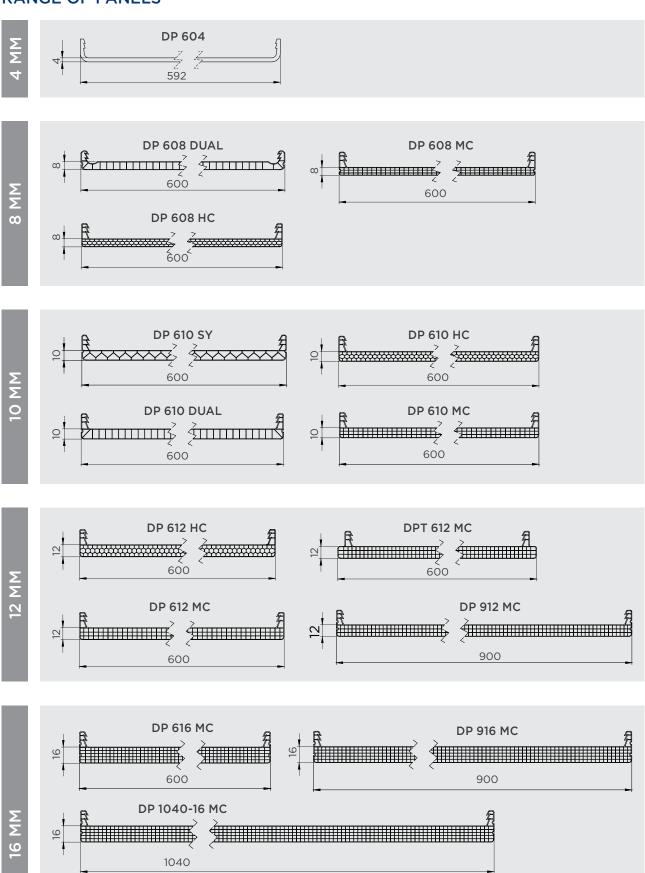

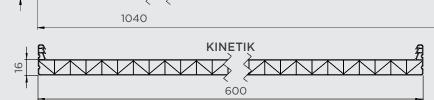

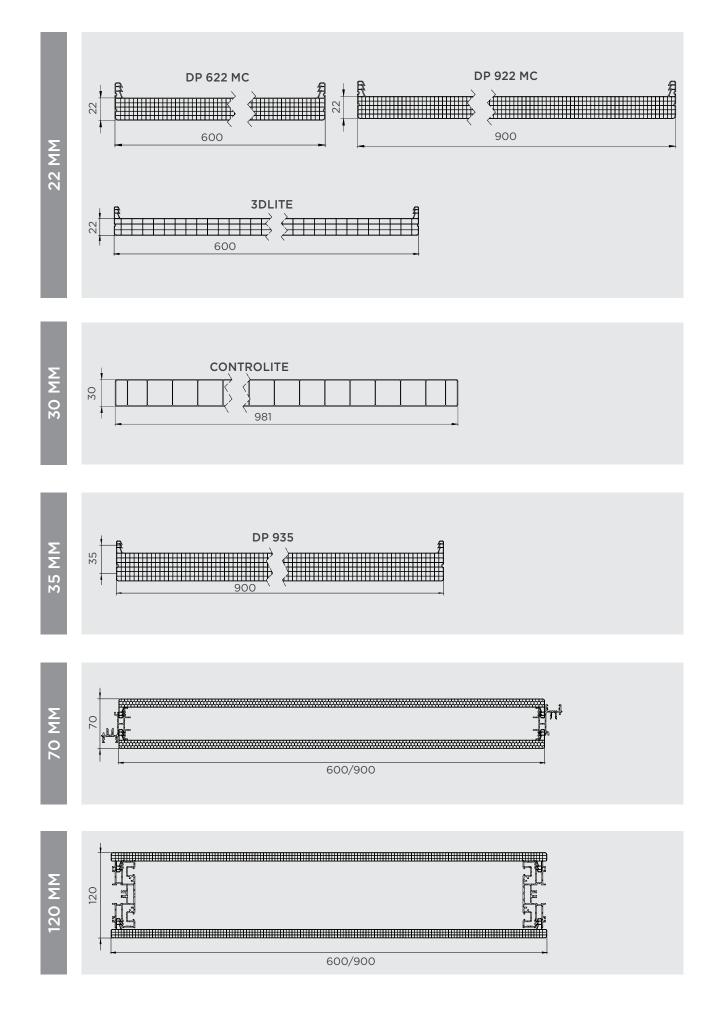

### TEST DATA AND TECHNICAL SUMMARY

| Test Description  | Test Procedure  | Results & Note   |
|---|---|--|
| <ul> <li>1. Flammability The data partially relates to flame retardant grades. European standards: <ul> <li>Self - Ignition</li> <li>Smoke Density of Plastic</li> <li>Burning Extent</li> <li>Interior Flame Spread and Smoke Development</li> </ul> </li> </ul> | EN 13501 - 1:2002<br>ASTM 1929-3<br>ASTM D-2843<br>ASTM D-635<br>ASTM E-84. | B - S1, d0<br>1058°F (570°C)<br>54%<br>CC1 rating - less than 1.0" burn extent<br>Several ratings are available:<br>Class B or C (I, II,III)                             |
| <ul><li><b>2. Weathering</b></li><li>Weathering Evaluation</li></ul>  | ASTM D4364-84   | Successful exposure to concentrated natural<br>sunlight radiation of 56000 MJ/M2(1540MJ/M2<br>of U.V.) at New River Site, Arizona  |
| <ul> <li>110mo Florida<br/>Weathering Evaluation</li> </ul>   |   | Impact, Cyclic wind loading shall not decrease<br>after 110 months of exposure to Florida weather  |
| Colour Change   | ASTM D2244  | No more that 3.0 units Delta E after 60 months   |
| Yellowing Index   | ASTM D1925  | No more than 10 points after 60 months   |
| Light Transmission  | ASTM D1003  | Will not decrease more than 6% after 10 years  |
| Heat Exposure Evaluation  | 300ºF, 25mins.  | The interior and exterior faces do not darken<br>more than 0 units Delta L /ASTM D2244, 0<br>units yellowing index/ASTM D1925 and 0% light<br>transmission / ASTM D 1003 |
| 3. Water Penetration  | ASTM E-331  | No penetration at test or pressure of 15 psf   |
| 4. Air Infiltration   | ASTM E-283  | 0.042 SCFM/ft. of dry glazed joint at test pressure of 15 psf  |
| 5. Impact   | ASTM E-822-81   | Panel repels hailstones of 25mm at velocity 21m/sec - no penetration   |
| <ul> <li>Sandbag impact test</li> </ul>   | AS/NZS 4040.4-1996  | Pass   |
|   | SPI (Method B)  | 220ft. lbs.  |
|   | PA 201-94   | Successfully tested per S. Florida hurricane<br>large missile cannon test at 350 Ft Lbs  |
| <ul> <li>OSHA Compliance –<br/>Point Load</li> </ul>  | 29 CFR 1910,23 (e) (8)  | 300 lb. Point load with no damage  |
| OSHA Compliance - Fall<br>protection / Walk through   | ASTM E 695-03   | 500 Ft. Lbs  |
| <ul><li>6. Accelerated Delamination</li><li>(Chaoter 42 of UBC Code]</li></ul>  | 300ºF, 25mins &<br>sub - zero temp.   | The faces do not become readily detached No delamination occurs under load   |
| 7. Vicat Softening Temperature  | DIN 53460<br>Iso 306 VST/B  | 142ºc  |
| 8. Long Service Temperature   |   | -40ºc to 120ºc   |
| 9. Expansion / Contraction  | Linear thermal expansion  | 0.065mm/m²c  |
| 10. Code Compliance (USA)   | ICBD Evaluation<br>UBC/BDCA/SBCCI   | See ICBD Report#ER-4798; SBCCI - PSI & ESI‡<br>Report #9373 Dade County #93-0329.05.<br>Several other approvals available  |
| 11. U.V. Protection   | Occasional cleaning with  | mild soap  |
| 12. U.V. Filtration   | Australian Standard<br>No.1067-1990   | Transmission Less Than 0.1%  |
| 13. ISO Quality Standard  | SI ISO 9001   | Danpalon <sup>®</sup> complies with Quality Management<br>Standard SI ISO 9001   |

\*Refer to technical information and consult our technical service department. Whenever reference is made to fire tests, the numerical rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

### **TECHNICAL FEATURES**

|   | DANPALON®<br>4mm   | DANPALON*<br>8mm                      | DANPALON®<br>10mm       | DANPALON®<br>12mm       | DANPALON®<br>16mm  | DANPALON®<br>22mm | DANPALON®<br>35mm      | 3DLITE      |
|---|--|---------------------------------------|-------------------------|-------------------------|--------------------|-------------------|------------------------|-------------|
| Number of walls                               |  | 4                                     | 4                       | 4                       | 6                  | 6                 | 7                      | 4           |
| Structure                                     | Solid<br>4mm   | Multicell/<br>Honeycomb               | Multicell/<br>Honeycomb | Multicell/<br>Honeycomb | Multicell          | Multicell         | Multicell              | Multicell   |
| Width (mm)                                    | 600  | 600                                   | 600                     | 600<br>900              | 600<br>900<br>1040 | 600<br>900        | 900                    | 600         |
| Ug (W/m².K)<br>CSTB calculated<br>values      | 5.2  | 3                                     | 2.6                     | 2.4                     | 1.9                | 1.5               | 1.2                    | 1.76        |
| Reaction to fire                              |  | B-s1,d0                               |                         |                         |                    |                   | N/A                    | B-s2,d0     |
| Span between<br>support                       |  | Up toUp toUp toUp to1.60m2m2m2.5m2.8m |                         |                         |                    |                   | According to connector | Up to<br>2m |
| Minimum slope<br>specific test                |  | 5° (or 9%)                            |                         |                         |                    |                   |                        |             |
| Minimum cold<br>bending radius                | 3.2m   | 2.5m 2.7m 2.8m 3.1m 3.5m              |                         |                         |                    |                   | 4.4m                   | 5.0m        |
| Manufactured<br>according to<br>certification | ISO 9001 ISO 14001   |                                       |                         |                         |                    |                   |                        |             |
| Ten-year warranty                             | Yes  |                                       |                         |                         |                    | N/A               | Yes                    |             |
| Impact and shock resistance                   | SOFT AND HARD BODY IMPACT<br>D1-10J - M50,300J - M50,400J  |                                       |                         |                         |                    |                   |                        |             |
| Technical<br>Book                             | Specialised reviews to EN standards throughout by SOCOTEC / CSTB Technical Assessment Department of cladding and roofing / Annual monitoring of the production factory by CSTB |                                       |                         |                         |                    |                   |                        |             |

The values in this table are subject to change over time. Please contact Danpal® for more information www.danpalon.com. Danpalon® panels are designed with multiple dimensions and cell structures, in order to offer solutions that match your requirements

### IDEAL FOR CUSTOMISED AND UNITISED SOLUTIONS

### Our full service offering

- Project engineers and the sales force in your region will accompany you and follow up your projects, from their inception to completion.
- Our design office will assist and guide you in the implementation of the most suitable solution for your specific needs.
- The order processing and preparation service offers customized orders, reinforced packaging, accurate labelling and impeccable delivery.
- Our support service will promptly respond and assist you in finding solutions for your on-site challenges.
- We offer a full material warranty and are committed to meeting our customers' deadlines.

## COLOUR YOUR ATMOSPHERE WITH THE DANPAL® PALETTE

## ABOUT THE COMPANY

### Innovative light architecture systems for building envelopes

Danpal<sup>®</sup> are creators of exceptional light-transmitting architectural systems for building envelopes, providing optimal solar and thermal comfort.

For 50 years, our innovative systems have helped architects to transform light (both natural and artificial) into a powerful and versatile tool, for architectural creations that are internally and externally radiant.

An industry visionary, Danpal<sup>®</sup> are originators of the Danpalon<sup>®</sup> translucent panel standing seam system - a light architecture solution used around the world in commercial, education, transport, health, sports and high-tech projects.

Today, the company offers complete systems - providing total solutions for the building envelope. Danpal<sup>®</sup> designs, manufactures and distributes an unmatched range of daylighting systems for all types of building requirements - from facades, cladding, roofs, skylights, shading, to interior and outdoor applications.

Danpal<sup>®</sup> systems are built around innovative technologies, deep architectural know-how and the ever evolving needs of our clients. Operating in five continents, Danpal<sup>®</sup> inspires architectural creativity with its rainbow of light architecture solutions.

# Danpalon® Glazing Material is an integral part of Danpal's range of systems - giving you a complete solution





www.danpal.com