



ArmstrongFlooring™

Varit® Elite




K6960-03A

Glimmer



K6960-04A

Puse

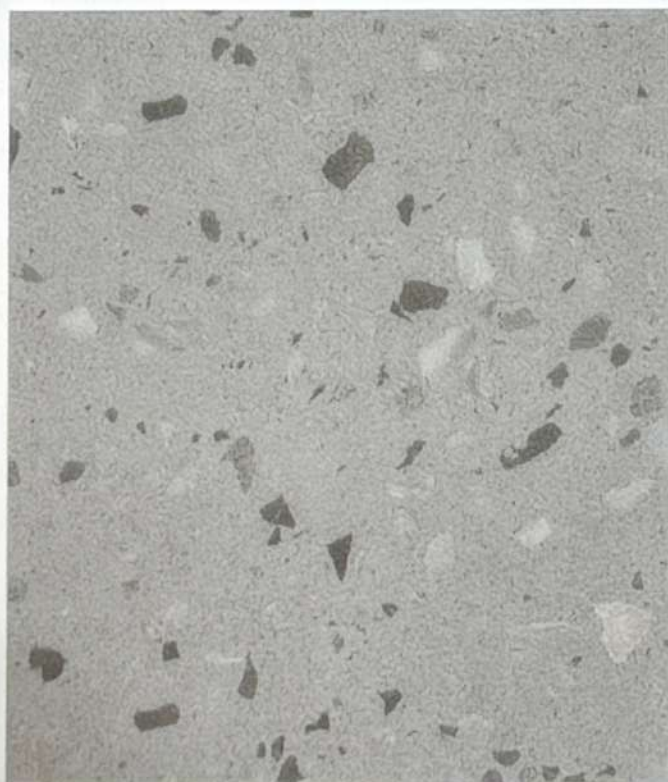

K6960-05A

Azurite



K6960-06A

Phantom

Varit® Elite Heterogeneous Vinyl Sheet

Armstrong Flooring™



K6993-01A

Creamy



K6993-05A

Snowing



K6993-09A

Sklit



K6993-21A

Misty



K6993-22A

Gravel



K6993-20A

Sandro

Technical Data

Characteristics	Standard	Unit	Result
Type of flooring	EN ISO 10582		Heterogeneous Vinyl Sheet
Surface treatment			TRUESHIELD for HET
Pattern			Concrete / Terrazzo
Safety criteria			
Flammability	EN 13501	class	B _{fl} -S1
Slip resistance	DIN 51130	class	R10
Dynamic coefficient of friction	EN 13893	class	DS
Performance behaviour			
Roll dimensions	EN ISO 24341	m	2.0m×15/20m
Overall thickness	EN ISO 24346	mm	2.0
Thickness of wear layer	EN ISO 24340	mm	0.7
Residual indentation	EN ISO 24343-1	mm	< 0.1
Dimensional stability	EN ISO 23999	%	< 0.4
Wear resistance	EN 649	class	T
Color fastness	EN ISO 105-B01	rating	> 6
Castor wheel test	EN ISO 4918		Applicable
Chemical resistance	EN 423		No stain 0
Classification			
Commercial very heavy	EN ISO 10582		Class 34
Additional property			

Castor chair  ✓

Antistatic behaviour  ✓

Underfloor heating  ✓

Chemical resistance  ✓

ArmstrongFlooring
Walk On, Walk Strong.

Varit® Elite

www.armstrongflooring.asia

YS-SF-Varit Elite -0725-HK Printed in China