



ArmstrongFlooring™


MedinTop™

Technical Data

Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581/EN 649		Polyurethane coated Homogeneous Sheet
Material			Polyvinyl chloride
Coating			Diamond 10
Safety criteria			
Flammability	EN 13501-1	class	B _{fl} - s1
Slip resistance	DIN 51130/EN DIN 16165	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
Impact sound reduction	ISO 14140/ISO 717-2	dB	3
Performance behaviour			
Roll width	ISO 24341/EN 426	m	2
Roll length	ISO 24341/EN 426	m	15/20
Overall thickness	ISO 24341/EN 428	mm	2.0
Total weight	ISO 23997/EN 430	kg/m ²	2.65
Wear resistance	EN 660-2/EN 649	group	T
Binder Content	EN ISO 10581	Type	Type I
Dimensional stability	ISO 23999/EN 434	-	X:0.4% Y:0.4%
DOP Content	EN 14372		ND
Migration of Certain Elements	EN71-3		Pass
Chemical Resistance	ISO 26987/EN423		Not Affected - Level 0
Color fastness	ISO 105-B02	rating	≥ 6
Static electrical charge	EN 1815	KV	≤ 2.0
Classification			
Domestic	EN685	class	23 heavy duty
Commercial	EN685	class	34 very heavy duty
Industrial	EN685	class	43 heavy duty
Additional property			
Castor chair  ✓	Underfloor heating  ✓	Antimicrobial and antifungal  ✓	
Antistatic behaviour  ✓	Chemical resistance  ✓		



Note: Samples are for colour selection only.
Please refer to the actual production sample for final approval.

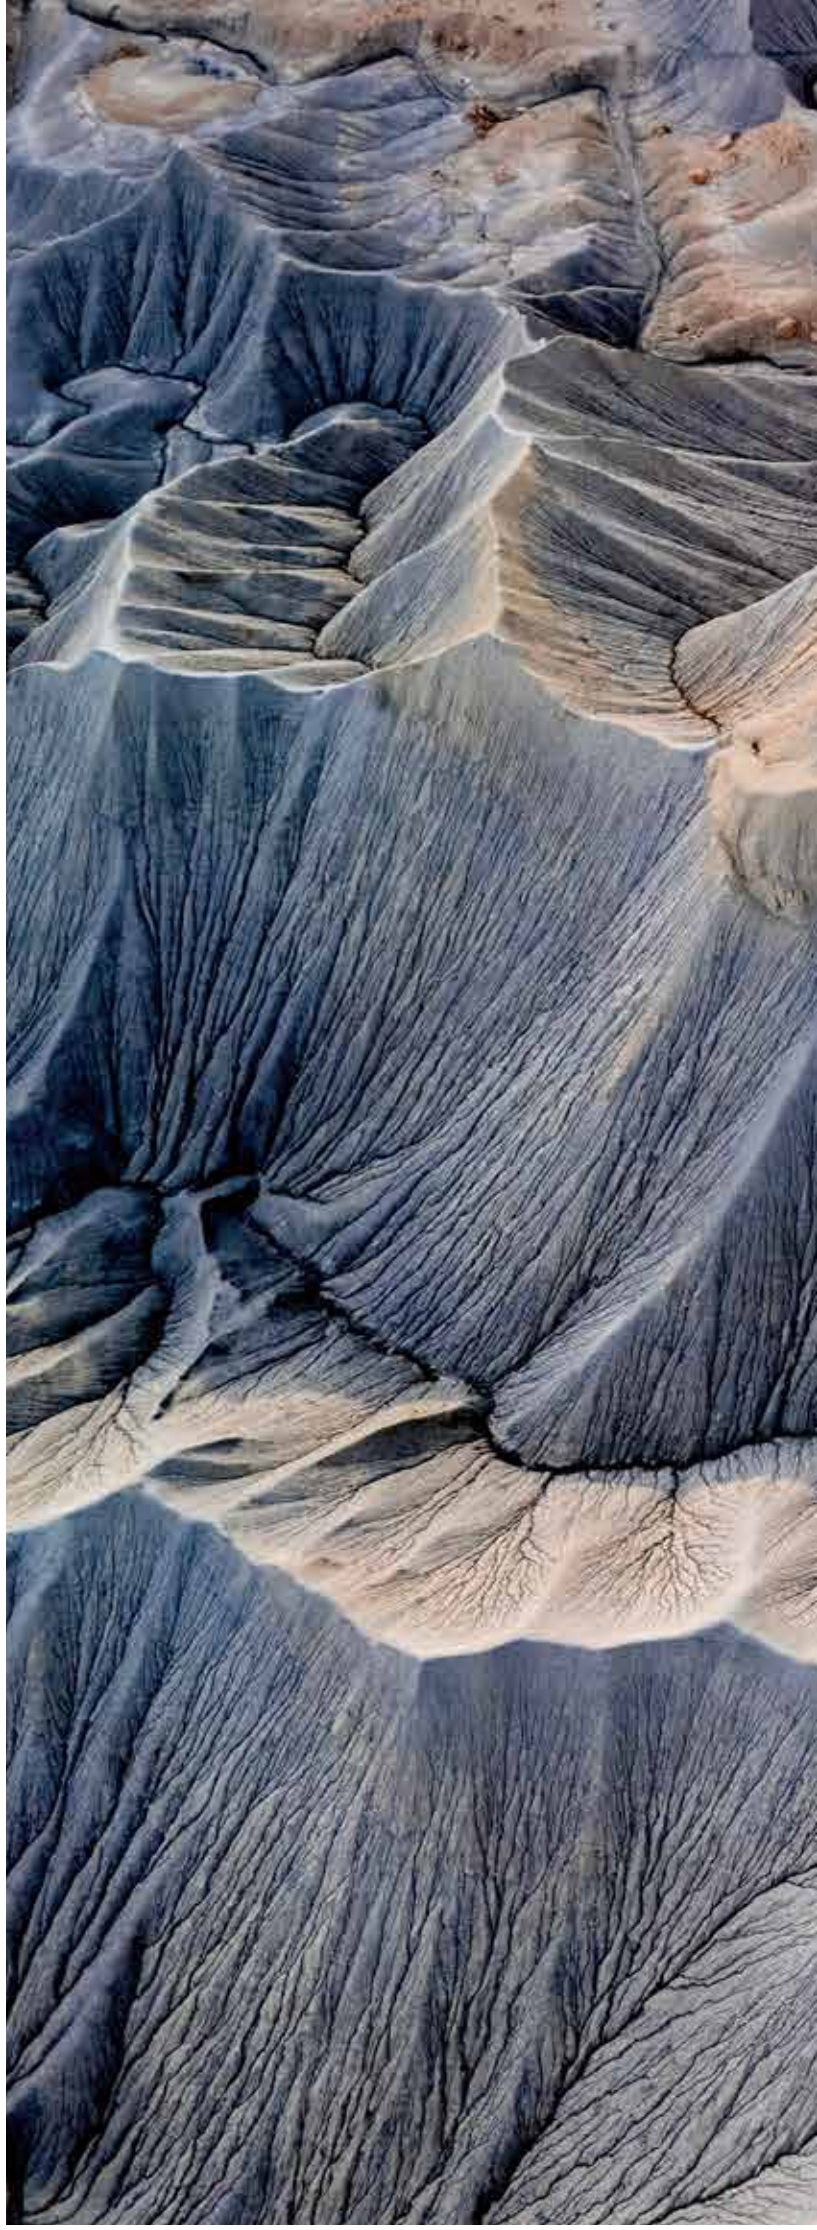


K900A-005H Argent Slate



K900A-009H Moderne Ash



K900A-008H Pale Whisper



K900A-002H Crystal Charcoal




K900A-001H Cadence Grey



K900A-004H Ironclad Grey



K900A-003H Luminous Slate



K900A-011H Steadfast Grey



K900A-204H Honeyed Taupe



K900A-206H Dune Khaki



K900A-207H Stonewashed Khaki




K900A-205H Hazelnut Beige



K900A-801H Nimbus White




K900A-006H Duskfall Grey

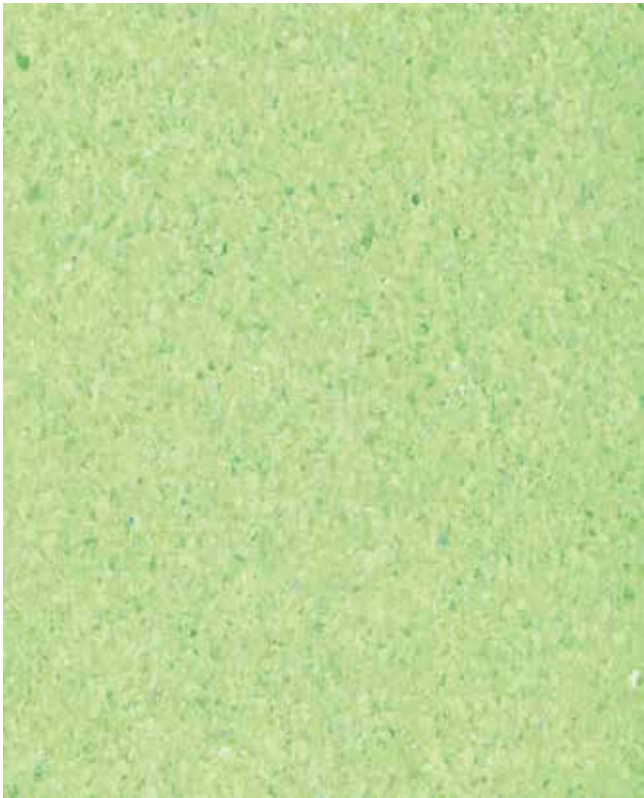

K900A-503H Mojito Mint




K900A-504H Moss Tundra




K900A-803H Ethereal Expanse




K900A-502H Turquoise Lagoon




K900A-603H Aqua Breeze




K900A-605H Celadon Haze




K900A-602H Celestial Navy




K900A-551H Plantain Leaf



K900A-501H Alpine Azure



K900A-604H Mystic Glen

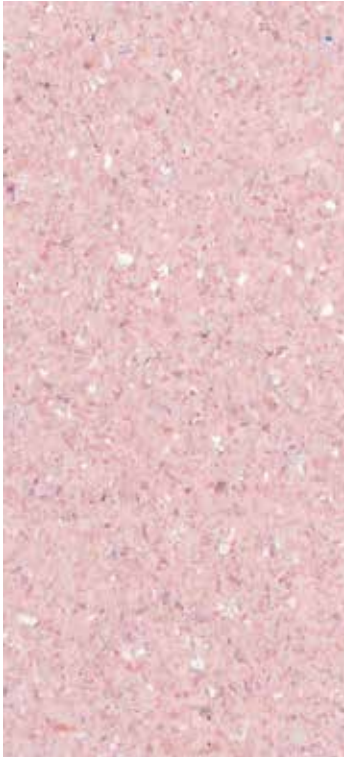

K900A-401H Blossom Veil
WP900-401



K900A-208H Mocha Mist



K900A-304H Amber Waves



K900A-701H Lilac Mist



K900A-402H Ruby Glow




K900A-702H Lavender Whisper

MedinTop™ Diamond 10 Coated Homogeneous Sheet



K900A-802H Lily of the Valley



K900A-301H Lemon Zest



K900A-010H Cloudveil



K900A-203H Desert Blonde



K900A-202H Ivory Cream




K900A-302H Solaris Gold




K900A-201H Ethereal Sands



K900A-303H Citrine Glow

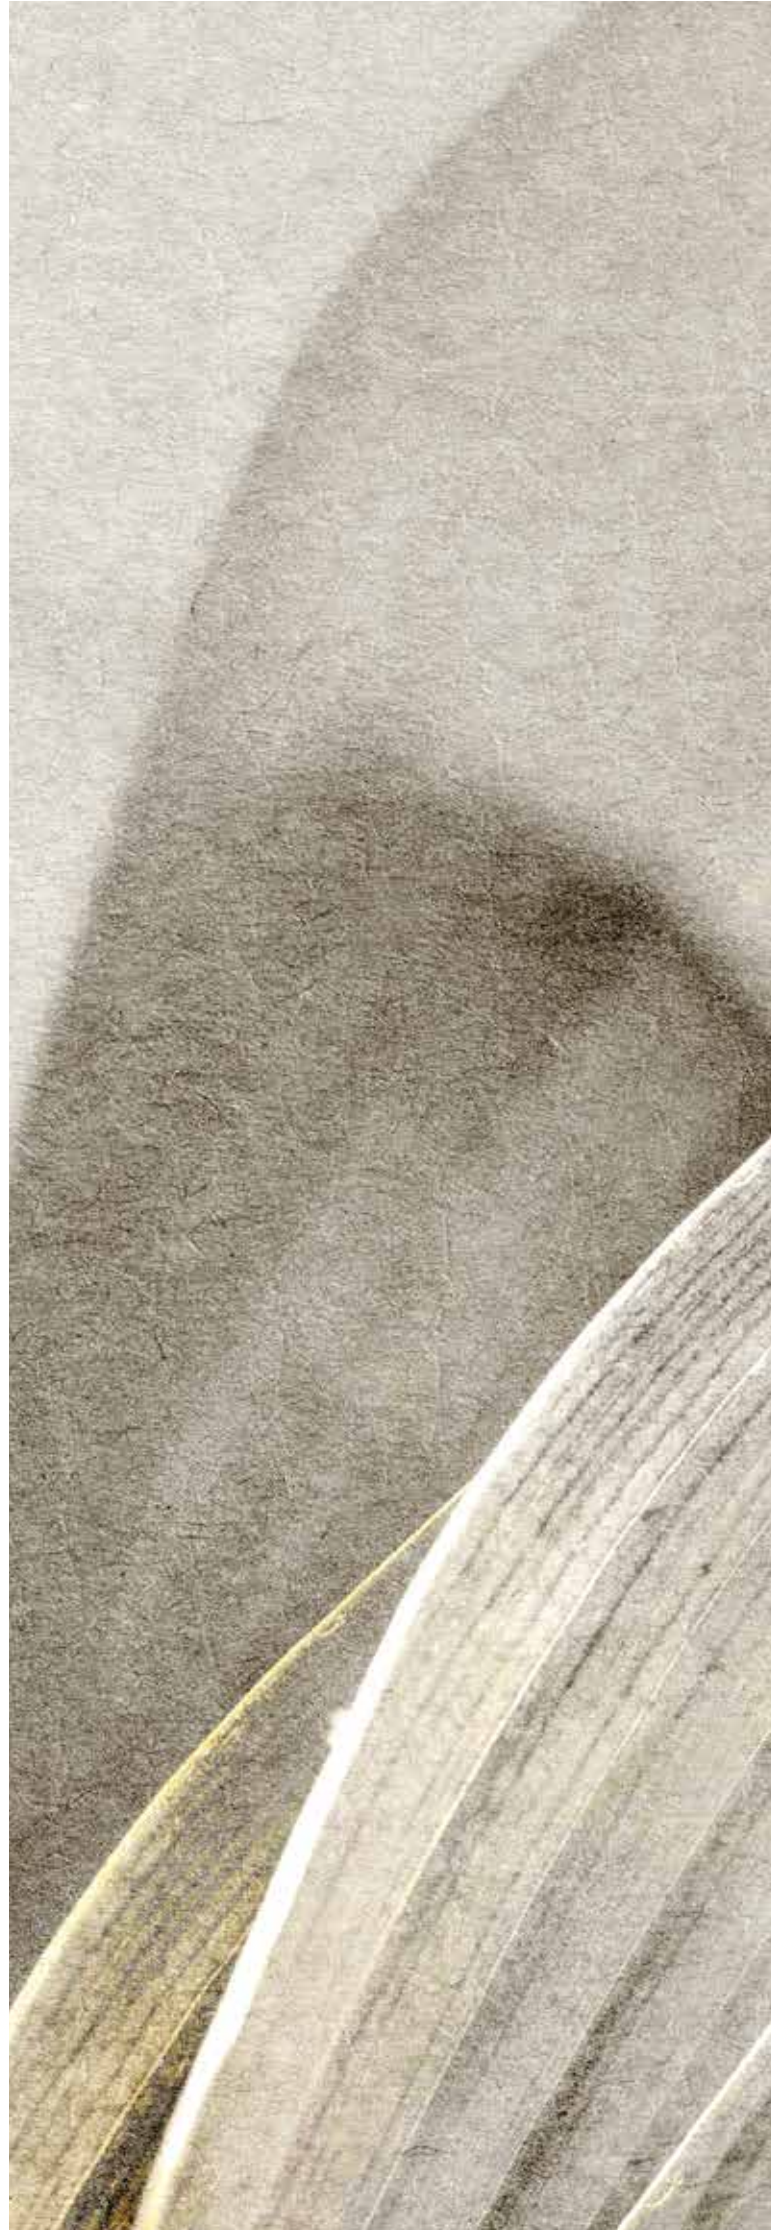

Hammered texture , enhanced durability with PU formulation

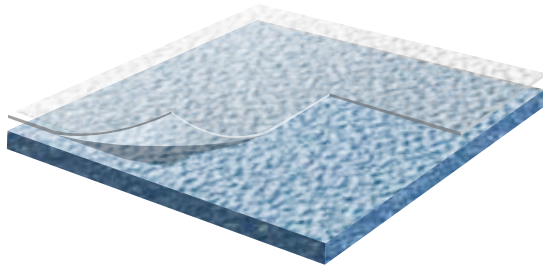

Unique hammered texture replicating natural marble, creating a soothing and healing sensation.

The uneven surface produces a diffuse reflection effect, preventing glare caused by smooth surfaces, reducing retinal irritation, and minimizing eye strain, offering greater visual comfort in daily environments

Environmental Benefits

- **Phthalate-Free Formulation:**
Contains no phthalate plasticizers, eliminating the risk of migration and safeguarding human health.
- **Formaldehyde-Free:**
No detectable formaldehyde.
- **Compliance with EN71-3:**
Meets standards with no detection of 19 migratable elements.
- **REACH Compliance:**
Conforms to stringent REACH regulations for chemical safety.

HPD (Health Product Declaration):

Promotes transparency by clearly disclosing product ingredients, building consumer trust in product health and safety.

EPD (Environmental Product Declaration)

An Environmental Product Declaration (EPD), classified as a Type III environmental label, provides transparent, third-party verified data on a product's environmental impact based on Life Cycle Assessment (LCA). Covering raw material extraction, manufacturing, transportation, use, and end-of-life, EPDs are recognized by USGBC as critical documentation for LEED and WELL credits and serve as a key criterion for selecting low-carbon, transparent materials.

FloorScore Certification:

Recognized globally, FloorScore certifies compliance with indoor air quality standards for resilient flooring products, contributing valuable points towards LEED certification.

Additional Information

- **Pollution Level:** Zero-level pollution rated, ensuring superior indoor environmental safety.
- **Sample Notice:** The provided sample is intended solely for colour selection; final selection should reference actual product samples.





ArmstrongFlooring™
Walk On. Walk Strong.™

MedinTop™



Website: www.armstrongflooring.aisa
Hotline: 400-606-0866

YS-SF-MedinTop-0725-PRC Printed in China

The above information is for reference only. Our company reserves the right to modify the details mentioned at any time.
For all contents in this manual, our company reserves all legal rights and final interpretation rights.